



112F SERIES DRILLED PORT OXYGEN BURNERS

The 112F Drilled Port Oxygen Burners are ideal when cold spots or multi-burner assemblies cannot be tolerated. The 112F Series has a staggered 3 row drilled port pattern giving the burner the ability to maintain a uniform flame regardless of flame length. The 112F Burners can be manufactured from either brass or stainless steel. The flame space can be anywhere from 1" to 14". It is important to note that flame space does not reflect the burner's overall length. The inlet is located center-back and is standardly 1/4" FPT. This burner can be used with propane, natural gas, or mixed gases and a mixture of oxygen. This makes the 112F an excellent burner for sealing operations, fire polishing, and forming.

Both the stainless steel and brass models are available with the water cooling option. This option helps to keep the burner cool for operator safety, and also helps to combat burner degradation from extreme temperature environments.

FLAME SPACE	MODEL NUMBERS	
	BRS	SS
1" to 1.9"	01	02
2" to 2.9"	03	04
3" to 3.9"	05	06
4" to 4.9"	07	08
5" to 5.9"	09	10
6" to 7.9"	11	12
8" to 9.9"	13	14
10" to 11.9"	15	16
12" to 14"	17	18

HOW TO ORDER

COOLING OPTIONS


0 = NONE
1 = WATER

MODEL NUMBER

FLAME SPACE

15C000-00.00

Example: A 4 1/2" brass water cooled 112F would be:
15C107-0450

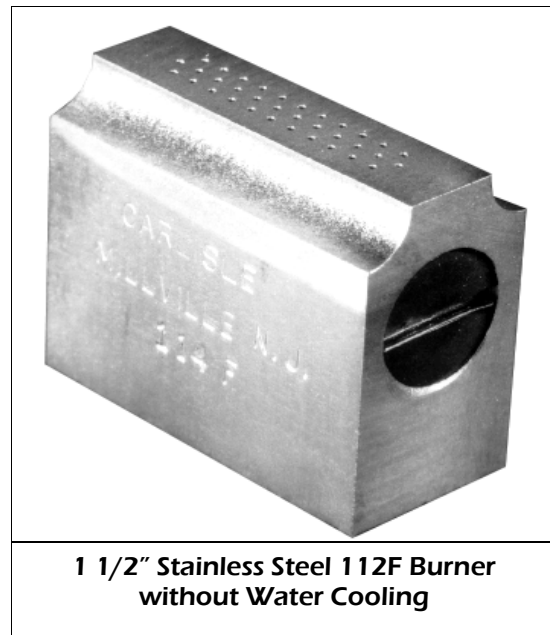

1 1/2" Stainless Steel 112F Burner
without Water Cooling

BULLETIN REFERENCES

The 112F Series Burners are pre-mixed. As with any pre-mixed burner, be sure to use the proper equipment:

- Mixers- Bulletins 17C, 16E
- Controls- Bulletins 16A, 16B, 16C, 16E
- Safety- Bulletins 18A, 18B

Carlisle Machine Works, Inc.,
P.O. Box 746, 412 S. Wade Blvd., Bldg. #5, Millville, NJ 08332
Phone: (800) 922 - 1167 Fax: (856) 825 - 5510
Web Site: www.carlislemachine.com E-Mail: carlisle@carlislemachine.com

